

# Lu130

## USB2 Megapixel Camera



### Outline

Lumenera's Lu130 series of megapixel cameras are designed to be used in a wide variety of applications, particularly in low-light conditions. Both color and monochrome product models are available.

With 1392x1040 resolution and on-board processing these cameras deliver outstanding image quality and value for industrial and scientific imaging applications.

Electronic Global Shutter provides capabilities similar to a mechanical shutter, allowing simultaneous integration of the entire pixel array. Ideal for capturing objects in high speed motion.

Uncompressed images in live streaming video and still-image capture are provided across a USB2.0 digital interface. No frame-grabber is required. Advanced camera control is available through a complete Software Developer's Kit, with sample code available to quickly integrate camera functions into OEM applications.

Hardware and software based synchronization trigger is provided standard. On-board memory is available for frame buffering. Lu130 model cameras are offered in both enclosed and board-level form. Custom form factor (sizes) can be provided.

All Lumenera products are supported by an experienced team of software developers and application engineers. We understand your imaging needs and are here to help you with your integration and development. Products come with a full one (1) year warranty.


### Features

- High quality CCD sensor
- Excellent sensitivity with high color reproductivity
- Color or Monochrome, Interline transfer Progressive scan, 1.3 Megapixel CCD sensor
- High speed USB2.0 (480Mbits/sec)
- 15 fps at full 1392x1040 resolution  
30 fps 640x480
- Global shutter for capturing fast moving objects and strobe lighting
- GPIOs for control of peripherals and synchronization of lighting (4in/4out)
- FCC Class B, CE Ready
- RGB Bayer video output
- Select 8 or 10-bit pixel data
- Simplified cabling - video and full camera control over a single USB cable
- C-Mount provided
- Direct Show compatible
- USB cameras are software compatible with Windows™ 98 SE, Windows Me, Windows 2K and Windows XP operating systems
- Complete SDK available.


# Specifications

# Lu130

Image Sensor	<b>1/2" format, color or mono, 7.6mm x 6.2mm array</b>
Effective Pixels	<b>1392 x 1040, 4.65um square pixels</b>
Frame Rate	<b>15 fps at 1392x1040, 50 fps with binning (2x - 4x) and ROI</b>
Sensitivity	<b>High</b>
Exposure	<b>Manual</b>
White balance	<b>Manual</b>
Dynamic Range	<b>60dB</b>
Dimensions (W x H x D)	<b>2.00 x 2.50 x 1.63 inches (board level) 2.25 x 3.85 x 1.56 inches (enclosed)</b>
Mass	<b>~150g / 300g</b>
Power Requirement	<b>External 6VDC, 800mA (included)</b>
Power Consumption	<b>~2.5Watts</b>
Operating Temperature	<b>0° C to +50° C</b>
Operating Humidity	<b>20%-80%, Non-condensing</b>
Interface Connector	<b>Standard USB cable</b>
Lens Mount	<b>C-Mount (CS-mount option)</b>
Frame Buffer	<b>3 frame buffer (optional expansion to 12 frames)</b>

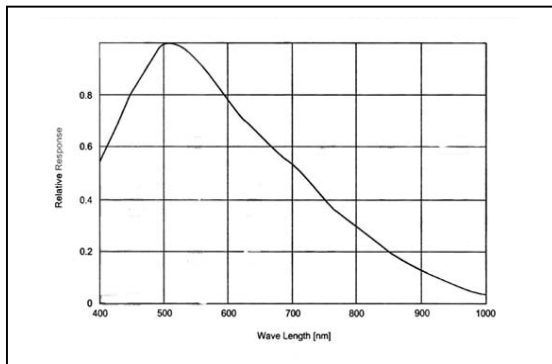

Mono Response Curve

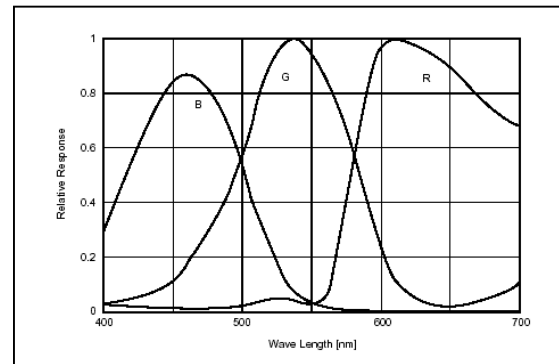


Color Response Curve

***Full customization  
available to meet your  
exact needs!***


## Ordering Information

Lu130M	- Monochrome Camera Module
Lu130C	- Color Camera Module
Lu135M	- Enclosed Monochrome Camera
Lu135C	- Enclosed Color Camera
LuSDK	- Developer's Kit and Accessories

## OEM Board-Level Camera

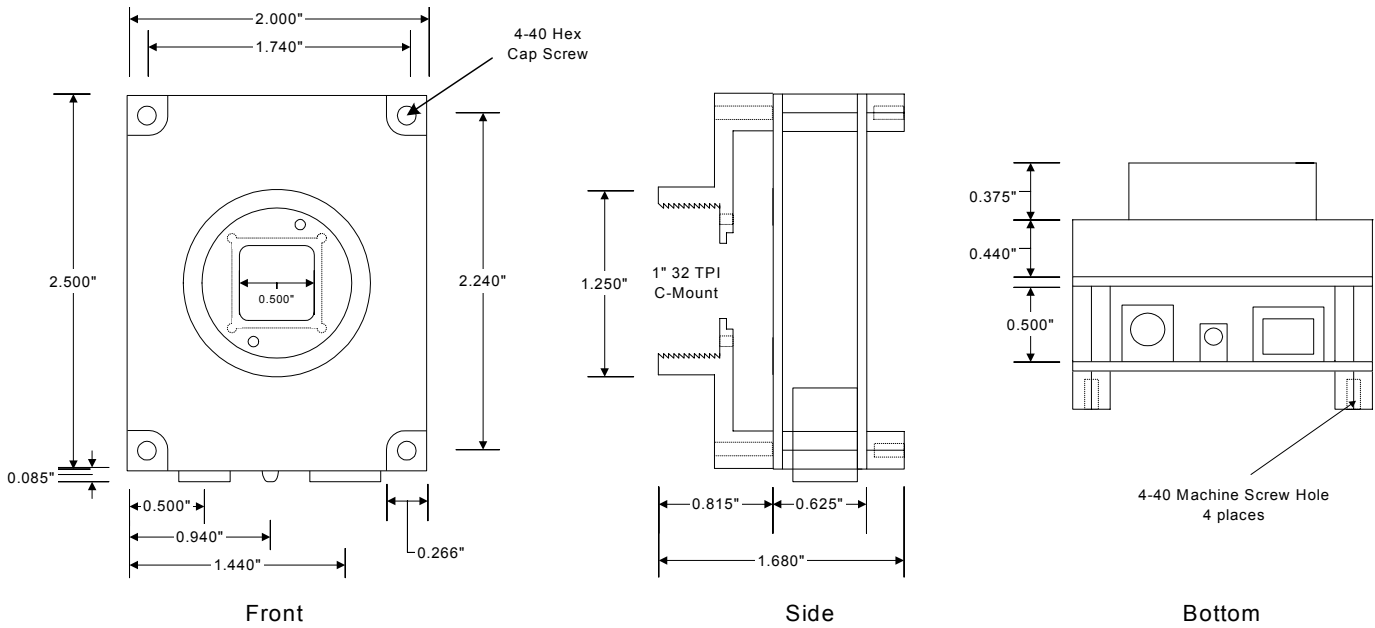

## Enclosed Camera

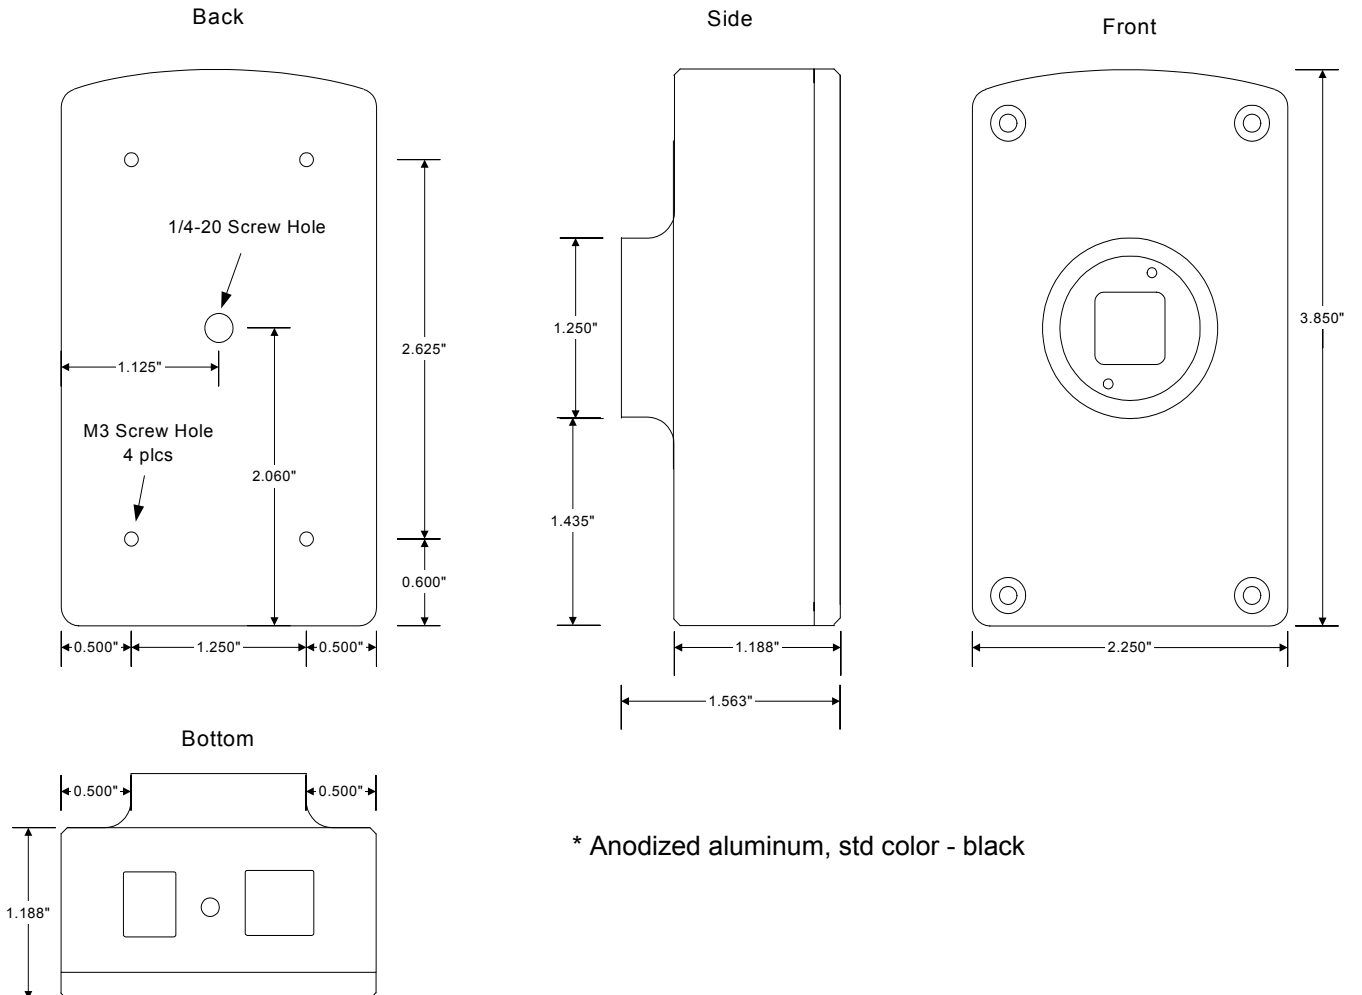

\* Anodized aluminum, std color - black